Varimixer

KODIAK10

Floor model

VERY SIMPLE INTUITIVE OPERATION Set the time and speed. Press start and stop. It's that simple, and everything is controlled at an ergonomic working height from the control panel.

FRONT ATTACHMENT DRIVE KODIAK

is also available with an attachment drive for meat mincers and vegetable slicers. - **IP44** Varimixer KODIAK can be cleaned in line with the IP44 standard.

PATENTED DETACHABLE SAFETY GUARD

The guard has an integrated filling tray, is made of transparent plastic and is dishwashersafe. It can be attached instantly without tools. The guard is held in place by magnets, which also serve as a safety cut-off.

WORLD'S MOST EFFECTIVE TOOL

Unique design increases speed at the periphery and reduces the working time.

ERGONOMIC RAISING AND LOWERING The ergonomically designed handle lowers and raises the bowl and locks it in place in a single movement.

STAINLESS STEEL Made of easy-to-clean stainless steel with a strong frame and hight, adjustable legs, to allow cleaning under the machine. The bowl, wire whip, beater, dough hook and scraper are also made of stainless steel and are dishwasher-safe.

RUNS ON 230 VOLTS KODIAK can be connected to a normal power outlet. A frequency converter and a three-phase motor make Varimixer KODIAK a very powerful mixer.

HEIGHT-ADJUSTABLE LEGS

VARIMIXER KODIAK10 OPTIONS - MODELS




Floor model, stainless steel



Marine version, Stainless steel

OPTIONS - ATTACHMENT DRIVE



Attachment drive for meat mincer and vegetable cutter



Meat mincer, stainless steel,



Vegetable cutter GR10

VARIMIXER KODIAK10 STANDARD TOOLS



Hook, whip, beater and bowl 10L in stainless steel.

SAFETY GUARD




Removable magnetic safety guard.

ACCESSORIES - TOOLS



Automatic scraper in stainless steel.

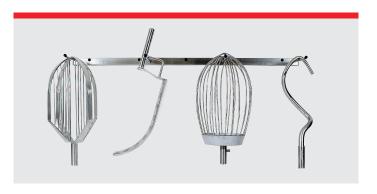

Tool rack, 91 cm

VARIMIXER KODIAK10 STANDARD Stainless steel construction Removable magnetic safety guard guard plastic Digital timer and emergency stop Scraper holder 1 bowl 10 liter in stainless steel 1 beater in stainless steel 1 hook in stainless steel 1 whip in stainless steel, 3mm wires Voltage: 1 ph, 230V, 50-60 Hz wiht 0 and ground. 700 W

VARIMIXER KODIAK10 STANDA	RD TECHNICAL DATA					
Volume	10	I				
Effect	700	W				
Voltage*	230	V				
Residual current devices (RCD): Industrial environment Light industry/domestic	HPFI type A-SI or PFI type E HPFI type A-SI	3				
Net weight floor model	120	kg				
Shipping gross weight	130	kg				
H x W x L (Shipping dimensions)	1420 x 680 x 680	mm				
H x W x L (Product dimensions)	1197 x 540 x 597	mm				
HS Code	84341010					
Vol. m³	0.66	m³				
Ldm	0.19					
Variable speed	72 - 451	RPM				
Phases	1	ph				
IP code	IP44					
*Other values a source comply are socilable ones request in the same of 100 to 400 V						

*Other voltage power supply are available upon request in the range of 100 to 480 V. All standard and marine mixers are available in 50 and 60 Hz.

VARIMIXER KODIAK10 MARINE VERSION

Slottet free screws. External transformer. Complies with USPHS.

Voltage: 2 ph, 400V, 50-60 Hz, with 0 and ground. 700 W 2 ph, 440V, 50-60 Hz, with 0 and ground. 700 W 2 ph, 480V, 50-60 Hz, with 0 and ground. 700 W

CAPACITIES					
Tools	Product			Special attention	
Whip	Egg Whites	0.5	I		
	Whipped cream	2.5	I		
	Buttercream frosting	4	1	+ 🗆	
	Layer Cake Sponges	2.5	kg		
	Mayonnaise	4	1	+	
Beater	Mashed potatoes	5	kg	+	
	Cakes	5	kg		
	Icing, Fondant	3	kg	+0	
	Herb Butter	3	kg	+ 🗆	
	Meatball / Vegan meatball mix	3	kg	+	
Hook	Pasta, noodles (50%AR)	6	kg	0	
	Dough, wheat (50%AR)	4	kg	0	
	Dough, wheat (55%AR)	5	kg	0	
	Dough, wheat (60%AR)	5	kg	0	
	Dough, whole wheat (70%AR)	5.5	kg		
	Dough, rye bread	6	kg	+	
	Dough, sourdough bread	5.5	kg		

The capacity chart shows the maximum capacity for the specific machine. The testing has been conducted with standard equipment. Therefore, the use of special tools, can result in a different outcome. Always start the machine at the lowest speed. Increase the speed subsequently, taking the product being mixed into account.

Symbols explainer - Recommened actions:

Dough, gluten free


- + = Apply scraper, for the best and most efficient result
- \square = Always make sure the ingredients are room temperature/soft. If not, this can damage the tools.
- Recommended to work on low speed.


CERTIFICATIONS


- **O** = Recommended not to go above medium speed.
- AR = Absorption Ratio (moisture in % of dry matter)

DIMENSIONS

Floor model, standard



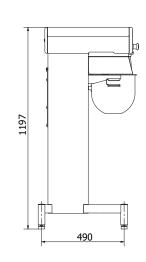







2 kg

Floor model, marine



Varimixer

Varimixer A/S Elementfabrikken 9 DK-2605 Brøndby P: +45 4344 2288 E: info@varimixer.com www.varimixer.com

